


SL-561 Size: 2/3AA

- Extended temperature range
- iXtra – long term high performance


Performance Data

(Typical values for batteries stored at +25 °C for one year)


| | |
|-----------------------------------|--------------------------|
| System | Lithium Thionyl Chloride |
| Nominal voltage | 3.6 V |
| Nominal capacity | 1.1 Ah |
| Nominal current | 1 mA |
| Max. continuous discharge current | 75 mA |
| Pulse current capability | 150 mA |
| Anode surface area | 9 cm ² |
| Lithium content | 0.5 g |
| Weight | 12.5 g |
| Volume | 5.2 cm ³ |
| Temperature range | -55 °C ... +130 °C |

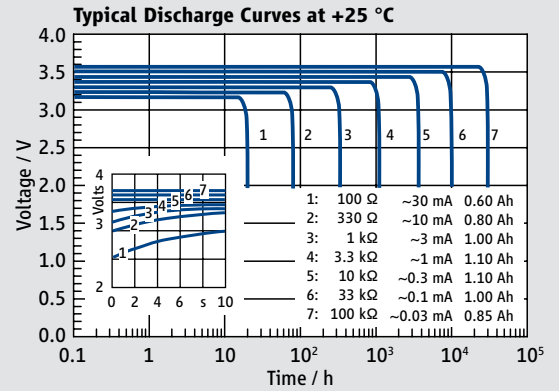


SL-561/S

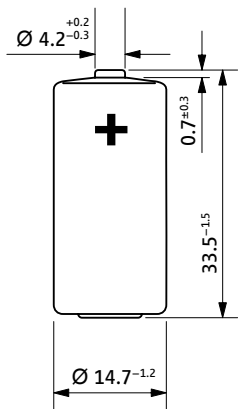


SL-561/T

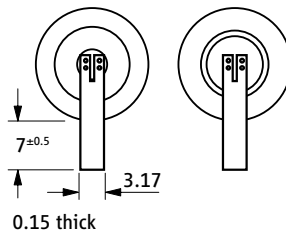


SL-561/P

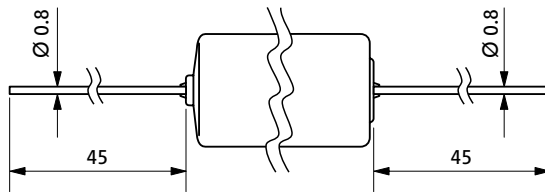


SL-561/PR

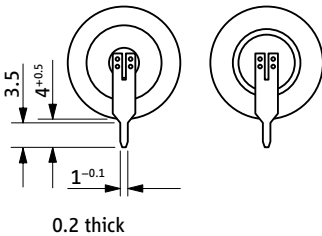


SL-561/PT

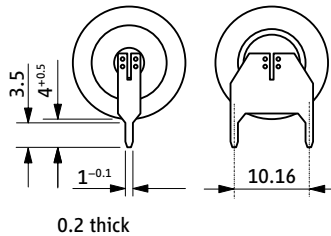

Available Capacity

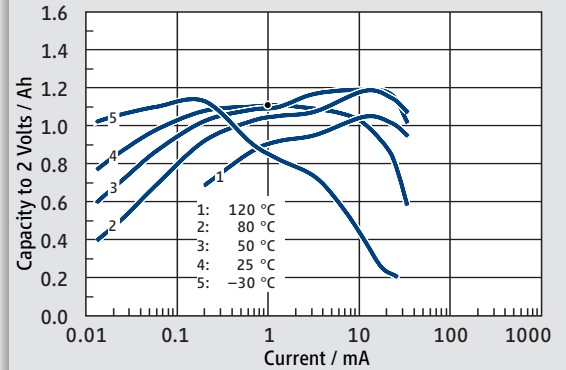

Operating Voltage

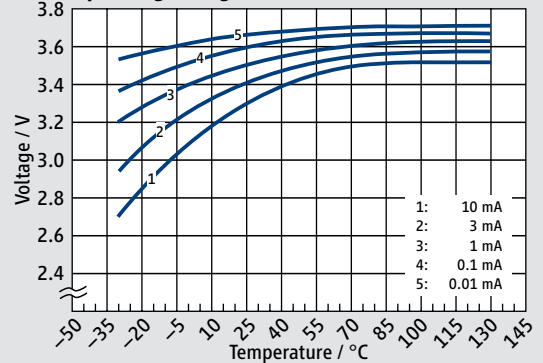

Available Terminations

| Termination | Standard | Catalogue No. |
|-------------|----------------|---------------|
| SL-561/S | Standard | 11 1 05611 00 |
| SL-561/T | Tags | 11 1 05612 00 |
| SL-561/P | Pins | 11 1 05613 00 |
| SL-561/PR | Pins radial | 11 1 05616 00 |
| SL-561/PT | Polarized tags | 11 1 05618 00 |

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150 °C, incinerate, or expose contents to water.