

# MODEL TL-6930


International size reference: D, ER32L615

## TECHNICAL DATA

(Typical values @+25°C for batteries stored for one year or less)




■ Nominal capacity @ 30mA, to 2V	16 Ah
■ Rated voltage	3.9 V
■ Weight	92.5g (3.26 oz)
■ Volume	51 cc
■ Operating temperature range	-40°C to +85°C
■ U.L. Component Recognition MH 12193	

**TADIRAN**  
**LITHIUM**  
**BATTERIES**

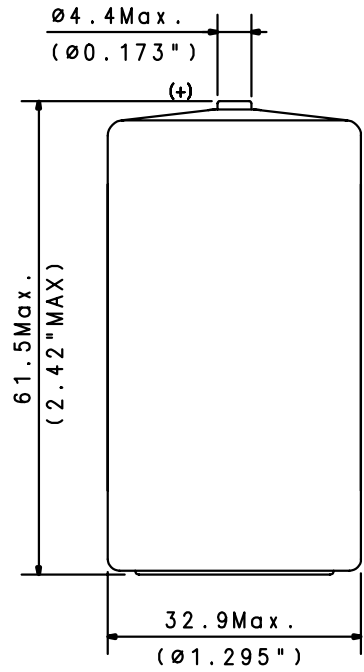

### AVAILABLE TERMINATIONS:

/S	P/N 15693021000	PRES. CONTACTS
/T	P/N 15693031000	SOLDERABLE TABS

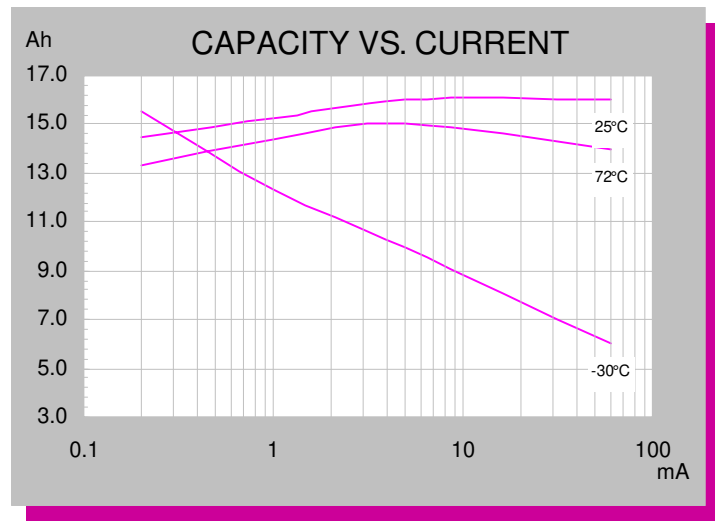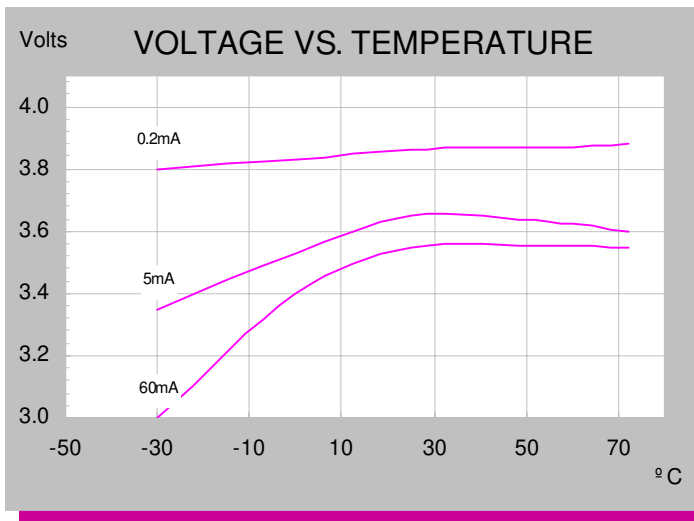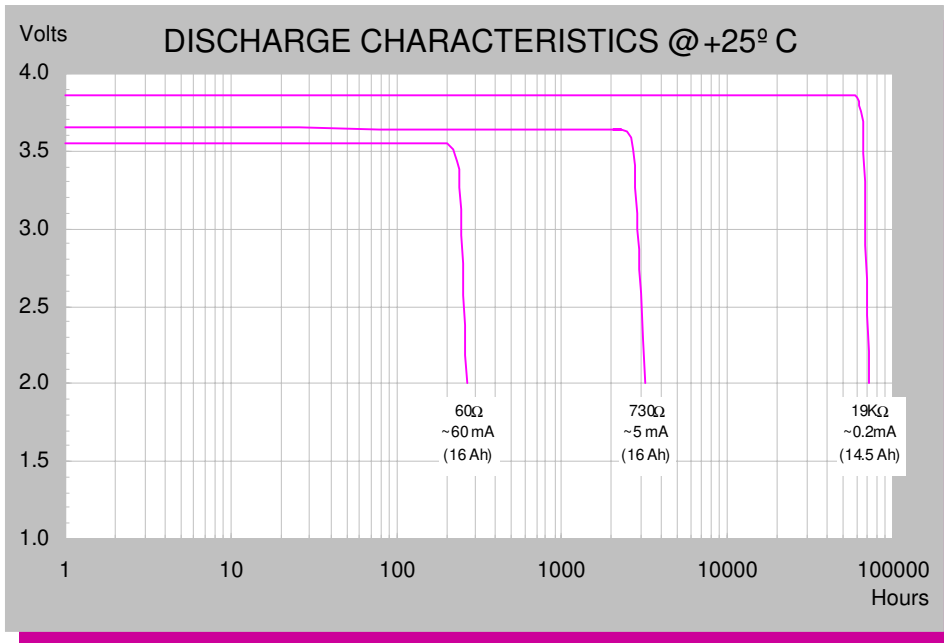

*For Pulses Plus Applications Only*

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. B 03/04

**CELL PACK**  
SOLUTIONS

Telephone: +44 (0)191 496 9999  
 Email: batteries@cellpacksolutions.co.uk  
 Website: www.cellpacksolutions.co.uk