

DATA SHEET

NO MERCURY ADDED

: Lithium Battery, 9V Size Description

Chemical System : Lithium Manganese Dioxide

Nominal Voltage : 9 Volts

Nominal Capacity : 800mAh @ 600Ω to 5.4V

Nominal Dimensions : 26 mm x 16.5 mm x 44.7 mm

: Standard snap fastener stud(+) and socket(-) **Terminals**

Shelf life : up to 10 years **Average Weight** : App. 34grams

Application : Smoke detectors, security devices, medical


> equipment, carbon monoxide alarms, explosion gas alarms, meters (gas/electric/water), metal detectors, wireless transmitters, electronic


toll collection system, etc.

Operating temperature : -40°C to 60°C

Cross References:


ANSI	Ultralife
1604LC	U9VL

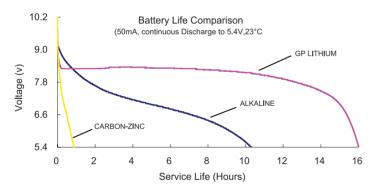


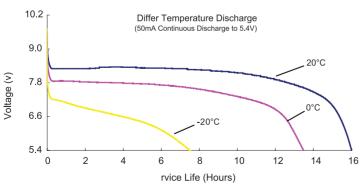

Model No.: GPCR-V9







The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

> Member Gold Peak Group

Unit: mm