

# High Temperature Series

## Nickel-Cadmium

### VNT D U HC

The new VNT U series benefits from the latest innovation on Saft's PNE (plastic bonded nickel electrode) technology. The VNT U series operates until + 55°C but also brings an improvement at low temperature, suiting perfectly with severe outdoor applications.

VNT D U HC is specially designed to accept a permanent charge in high temperature environment such as emergency lighting equipment. VNT D U HC offers at least 4 years of life duration at an average temperature up to + 55°C in accordance to the IEC 61951-1 standard (U type cells). VNT D U HC is ICEL 1010 registered for + 55°C applications.

To meet customers' requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

#### Applications

- Emergency lighting
- Professional lighting
- Memory back-up systems
- Security devices

#### Main advantages

- Good charge efficiency at high temperature
- Good autonomy at low temperature
- Permanent charge
- Good storage retention
- Long life duration at high temperature

#### Technology

- Plastic-bonded positive electrode
- Plastic-bonded negative electrode



#### Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	4500
IEC minimum capacity (mAh)*	4200
IEC designation	KRMU 33/62
Impedance at 1000 Hz (mΩ)	6

\* Charge 16 h at C/10, discharge at C/5.

#### Dimensions

Diameter (mm)	32.15 ± 0.1
Height (mm)	59.9 ± 0.4
Top projection (mm)	3.1 ± 0.4
Top flat area diameter (mm)	5.6
Weight (g)	124

Dimensions are given for bare cells.

#### Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard *	16	+ 15 to + 55	420
Permanent		+ 15 to + 55	210
Trickle **			100 to 130

\* End of charge cut-off is requested: timer, coulomb meter.

\*\* Trickle charge follows full charge.

#### Maximum discharge current

Continuous (A) at + 20°C	14
Peak (A) at + 20°C*	150

\* Peak duration: 0.3 second - final discharge voltage 0.65 volt/cell.








**saft**

**Temperature range in discharge**  
 - 20°C to + 70°C

**Storage**  
 Recommended: + 5°C to + 25°C  
 Relative humidity: 65 ± 5 %

**Typical performances**  
 For graph shown, C is the IEC<sub>5</sub> capacity.

Dimensions in mm.

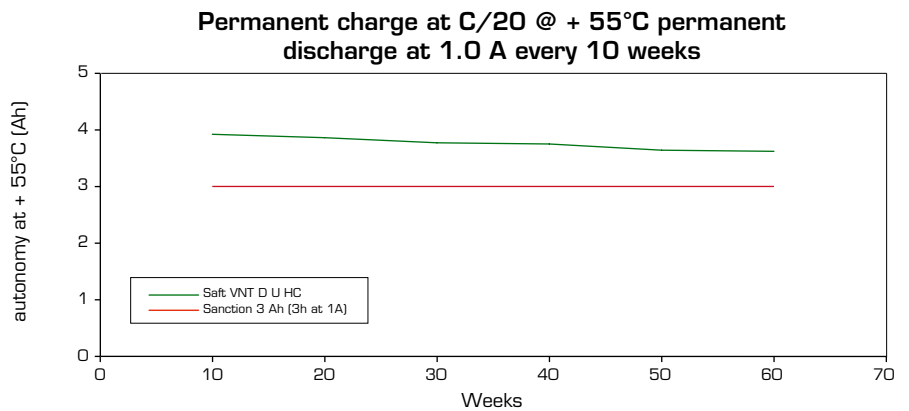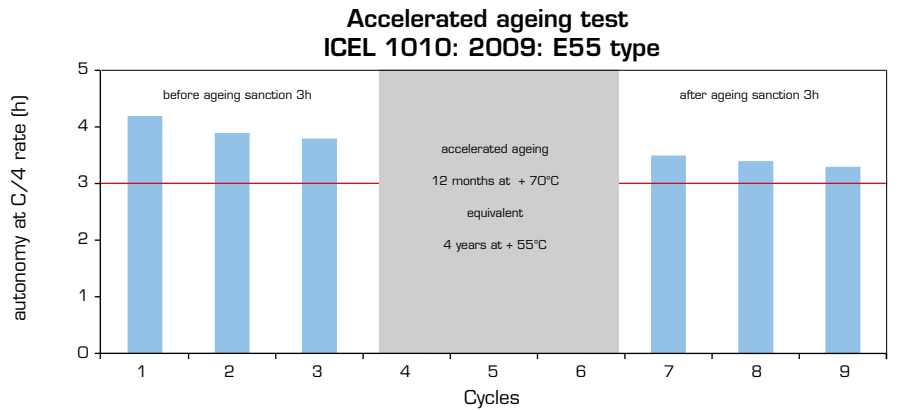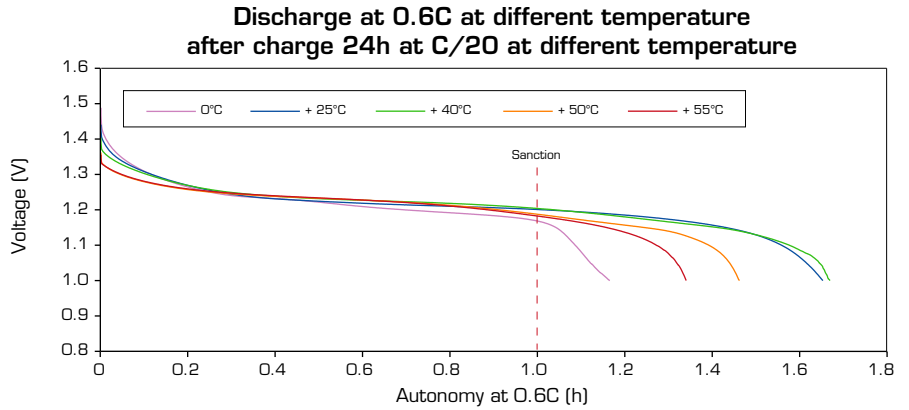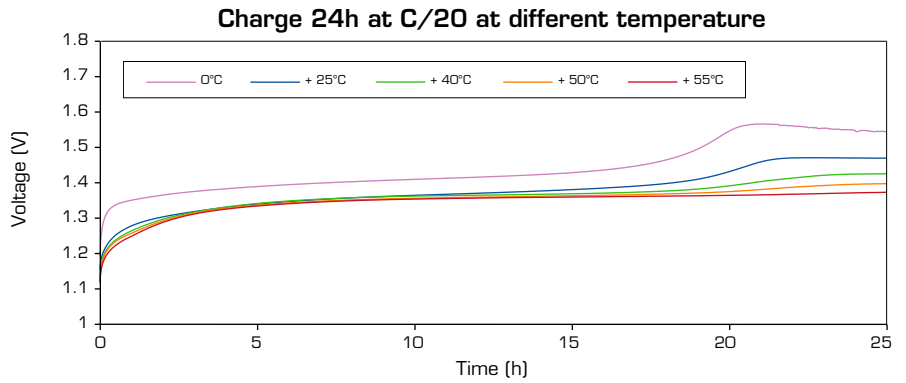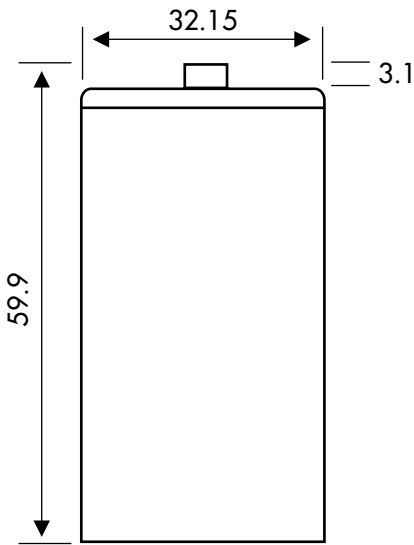

Telephone: +44 (0)191 496 9999  
 Email: batteries@cellpacksolutions.co.uk  
 Website: www.cellpacksolutions.co.uk

DOC N°11136-2-0311  
 Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.  
 Photo credits: Saft  
 Published by the Communication Department  
 Saft SAS Stock capital 31.944.000 €  
 RCS Bobigny B 383 703 873  
 Designed by Soyouzgraphic

