


Yuasa Battery Sales (UK) Ltd

MODEL No: 1FM (GENERIC)

Description: F SIZE NI-MH

Capacities Available : 10000, 11000 and 13000 mAh

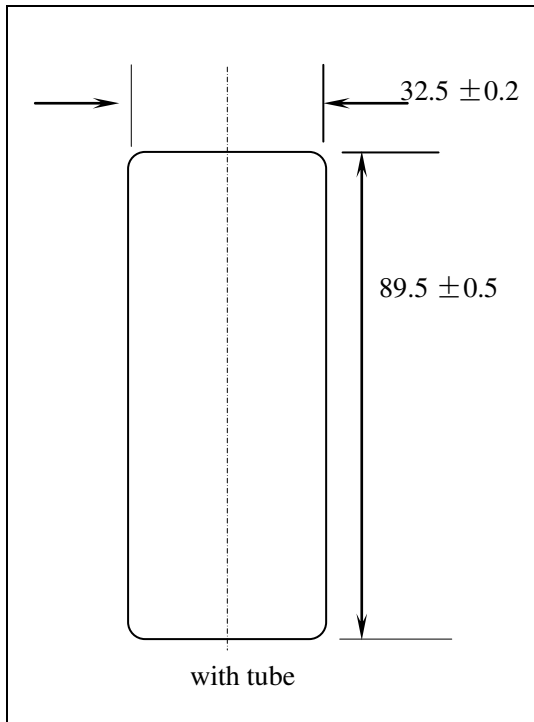

Specification

Nominal Capacity		As Spec	
Nominal Voltage		1.2 V	
Charge current	Trickle	0.05 - 0.1 CA	
	Standard	0.1 CA	
	Quick	0.3 CA	
Charge time	Standard	14~16 Hrs	
	Quick	4~5 Hrs	
Ambient Temperature	Charge	Standard	0~45°C
		Quick	10~45°C
	Discharge		-30~60°C
	Storage		-30~65°C
Max Humidity for Discharge		85%	
Internal Impedance(AC) (After Charge using 1Khz)		Average ≤ 6.5	
Weight		255g	

Performance

Test	Unit	Specification	Test Conditions
Capacity	mAh	≥ Capacity as specified	Standard Charge and then Discharge (0.2CA for 5 Hours) Allowing up to 3 cycles to achieve full capacity
Open Circuit Voltage(OCV)	V/cell	≥ 1.25	Within 1 hour after standard Charge
High Rate Discharge(1C)	Minute	≥ 54	Standard Charge then 1 hour rest. Before discharge by 1CA)to 1.0V/cell. Allowing up to 3 cycles to achieve full capacity.
Overcharge	/	No leakage nor explosion	(0.1C) Charge 28 days
Charge Retention	mAh	≥ 0.7C (70%)	Standard Charge, Storage 28 days, Standard Discharge
IEC Cycle Life	Cycle	≥ 500	IEC285(1993)4.4.1
Leakage		No leakage nor deformation	Fully charged at : (0.3C) for 4.5 hrs. Then stand for 14 days

- Maximum Cell voltage should be considered to be 1.70 Volts.
- -ΔV termination should be set at 6 mV/cell.
- DT/dt termination should be 0.6°C/Minute.

CELL PACK
SOLUTIONS

Telephone: +44 (0)191 496 9999
Email: batteries@cellpacksolutions.co.uk
Website: www.cellpacksolutions.co.uk