

Model No.: **GP364F**

Description : Mercury and Lead Free button cell
 Chemical System : Zinc/Silver Oxide
 Nominal Voltage : 1.55V
 Nominal Dimension : $\Phi 6.80\text{mm} \times 2.15\text{mm}$
 Applications : Analog watch
 Average Weight : 0.35g
 Shelf Life : Not less than 90% of the service capacity within first year storage at $20 \pm 2^\circ\text{C}$ 55 \pm 20 %RH;
 Warranty 1 year.


Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.

Close Circuit Voltage : 1.25 V(min.) (load resistor 400Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)
 Nominal Service Life(at $20 \pm 2^\circ\text{C}$) : 172hrs (load $15\text{k}\Omega$ cut off 1.2V)
 575hrs (load $50\text{k}\Omega$ cut off 1.2V)

Average Service Capacity($20 \pm 2^\circ\text{C}$) : 18mAh (load $50\text{k}\Omega$ to cut off 1.2V)

Cross References:
 IEC Maxell Duracell Others

SR60	SR621SW	D364	V364
------	---------	------	------

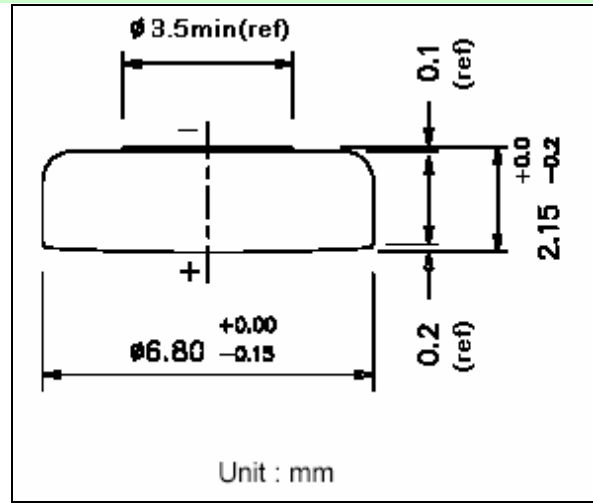

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

