

Model No.: **GP377F**

Type : Mercury and Lead Free button cell

Chemical System : Zinc/Silver Oxide

Nominal Voltage : 1.55V

Nominal Dimension : $\Phi 6.80\text{mm} \times 2.60\text{mm}$

Applications : Analog watch

Average Weight : 0.4g

Data Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.

Shelf Life : Not less than 90% of the service capacity within first year storage at $20 \pm 2^\circ\text{C}$ $55 \pm 20\% \text{RH}$; Warranty 1 year.

Close Circuit Voltage : 1.25 V(min.) (load resistor 300Ω at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 s conds)

Nominal Service Life : 220hrs (at $15\text{k}\Omega$ load)


Life (to 1.2V at $20 \pm 2^\circ\text{C}$)

Average Service Capacity : 25mAh (at $50\text{k}\Omega$ load)

Capacity (to 1.2V at $20 \pm 2^\circ\text{C}$)

Cross References:

IEC	Maxell	Duracell	Others
SR66	SR626SW	D377	V377

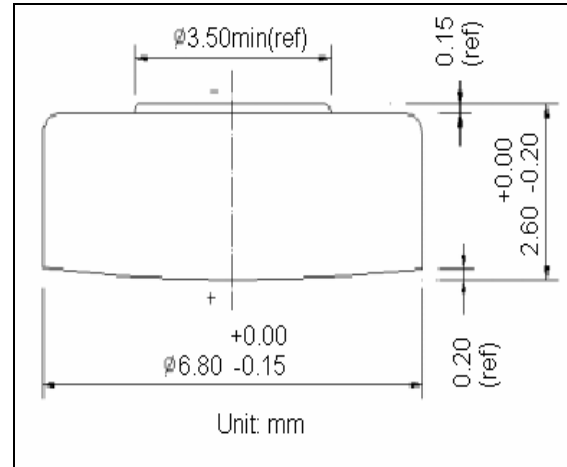

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

